


Accompanying the Recovery Journey

PRO-OS-505

www.procaremedfurn.com

- Intensity: 1,55,000 +1,55,000 Lux
- No. of LED's: 55 + 55
- Intensity Control: 10~100
- Digital Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635+635 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 44 + 44 watt
- Special Function: Dual memory function

Create a Safer Environment

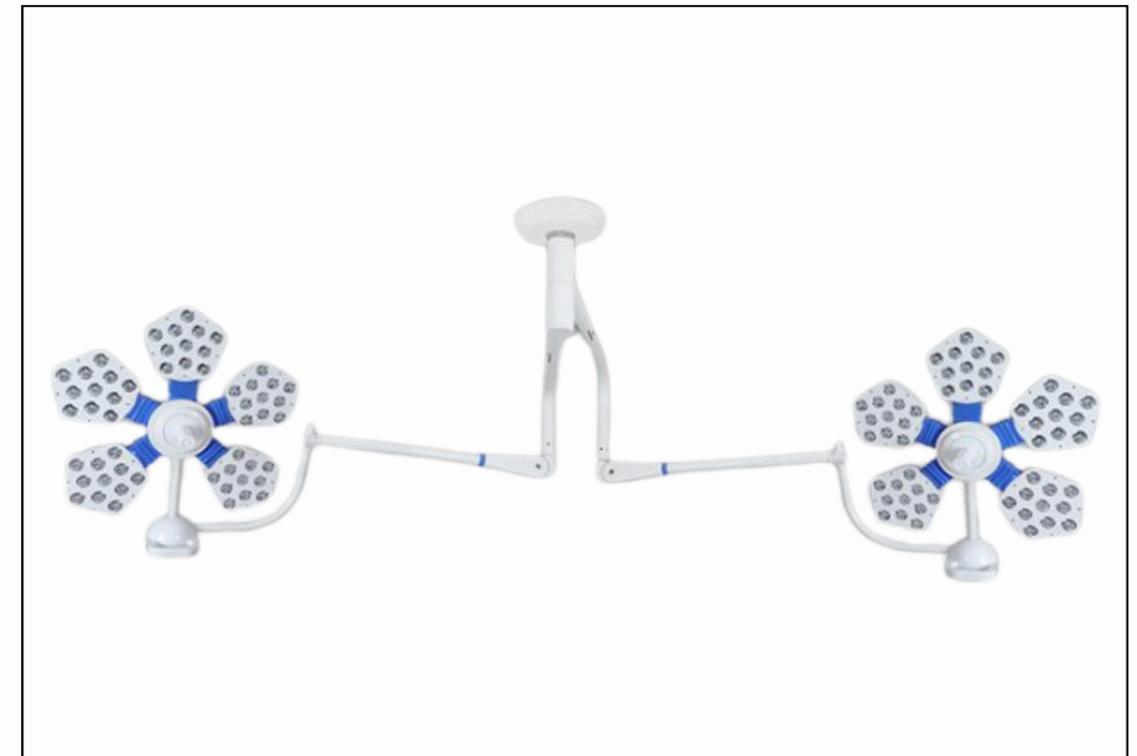

CE

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062


Mob no: +91 8377832832

Web Site : www.procaremedfurn.com

GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

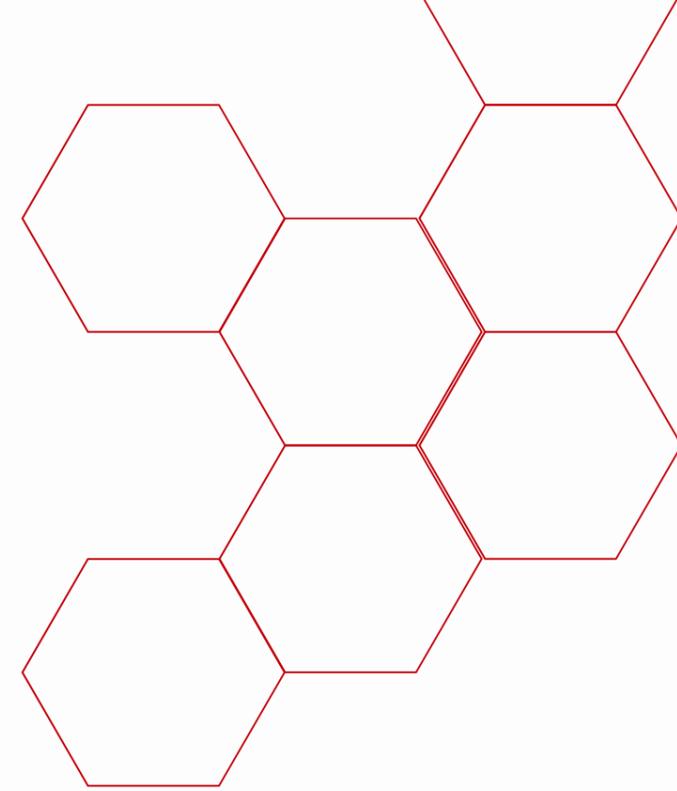


Accompanying the Recovery Journey

PRO-OS-504

www.procaremedfurn.com

- Intensity: 1,55,000 +1,35,000 Lux
- No. of LED's: 55 + 44
- Intensity Control: 10~100
- Digital Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635+635 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption; 44 + 35.2 watt
- Special Function; Dual memory function

Create a Safer Environment

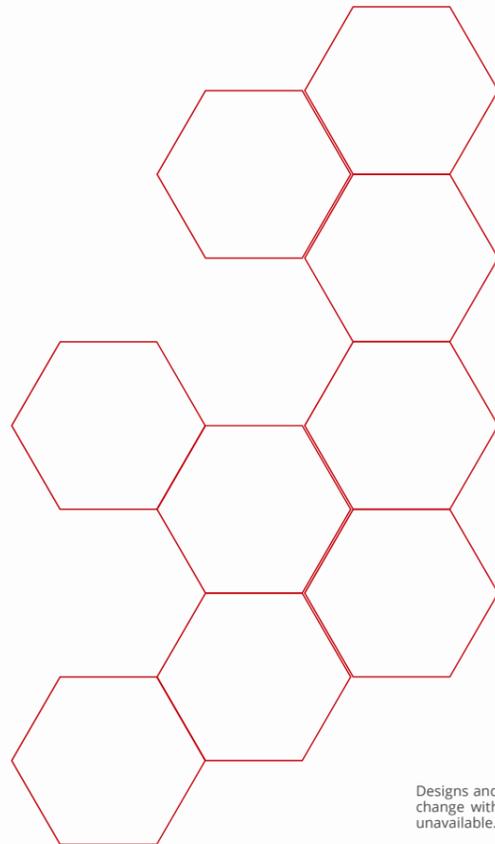

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062

Mob no: +91 8377832832


Web Site : www.procaremedfurn.com


GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

CE

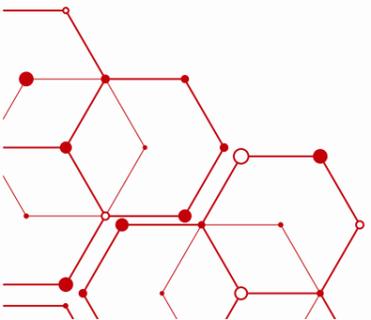

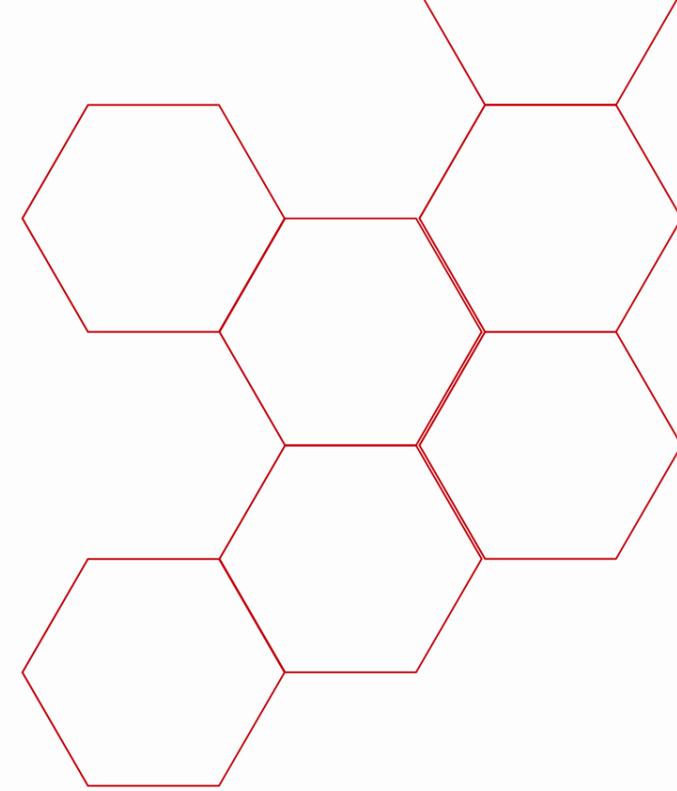


Accompanying the Recovery Journey

PRO-OS-503

www.procaremedfurn.com

- Intensity: 1,55,000 +1,00,000 Lux
- No. of LED's: 55 + 33
- Intensity Control: 10~100 Digital Touch
- Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635+585 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 44 + 26.4 watt
- Special Function: : Dual memory function

Create a Safer Environment

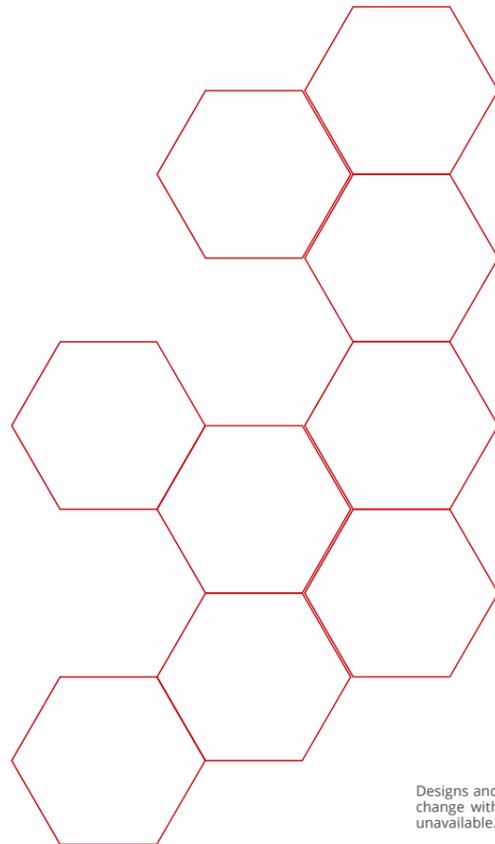

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062

Mob no: +91 8377832832


Web Site : www.procaremedfurn.com


GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

CE

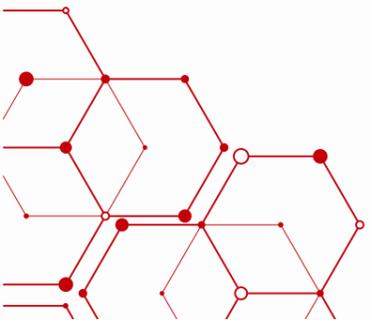

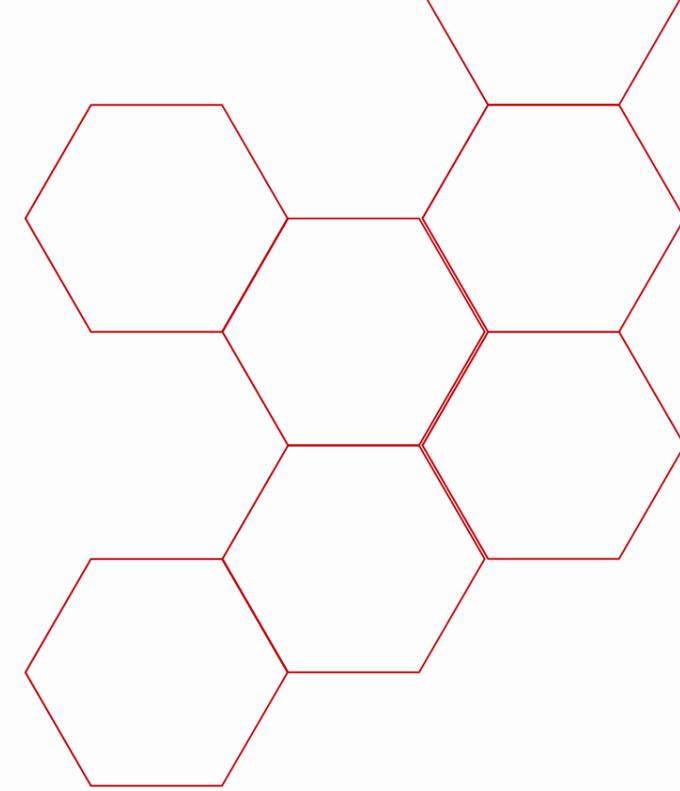


Accompanying the Recovery Journey

PRO-OS-403

www.procaremedfurn.com

- Intensity: 1,35,000 +1,00,000 Lux
- No. of LED's: 44 + 33
- Intensity Control: 10~100 Digital
- Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635+585 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 35.2 + 26.4 watt
- Special Function: Dual memory function

Create a Safer Environment

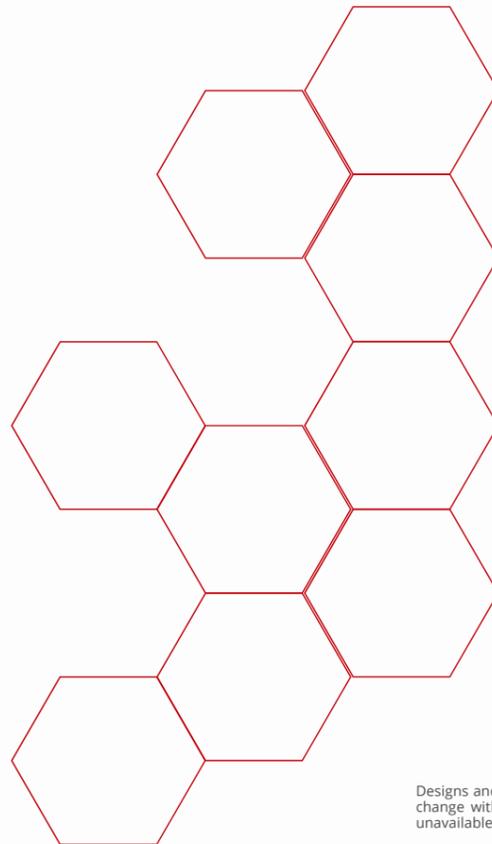

CE

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062


Mob no: +91 8377832832

Web Site : www.procaremedfurn.com

GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

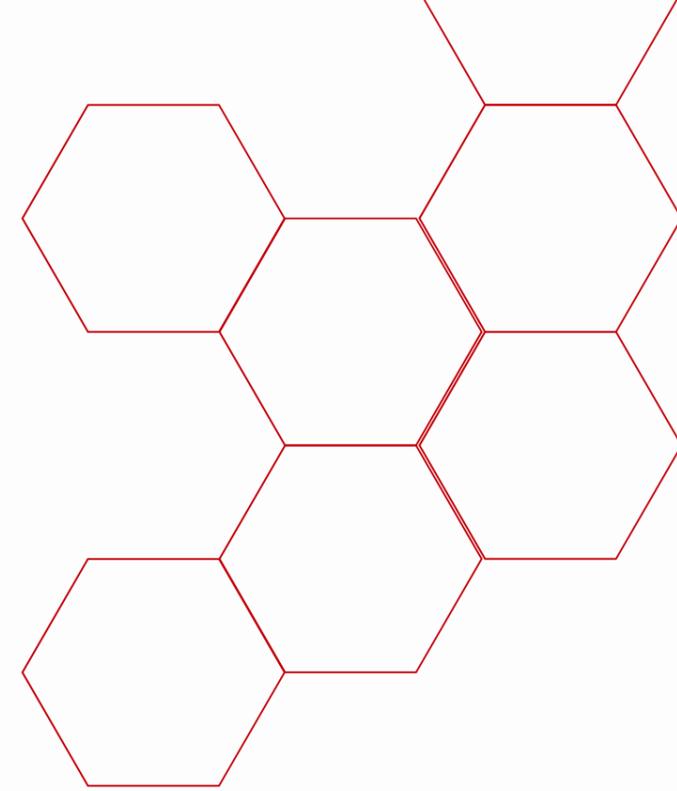


PRO-OS-404

www.procaremedfurn.com

Accompanying the Recovery Journey

Create a Safer Environment

- Intensity: 1,35,000 +1,35,000 Lux
- No. of LED's: 44 + 44
- Intensity Control: 10~100 Digital
- Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635+635 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 35.2 + 35.2 watt
- Special Function: : Dual memory function

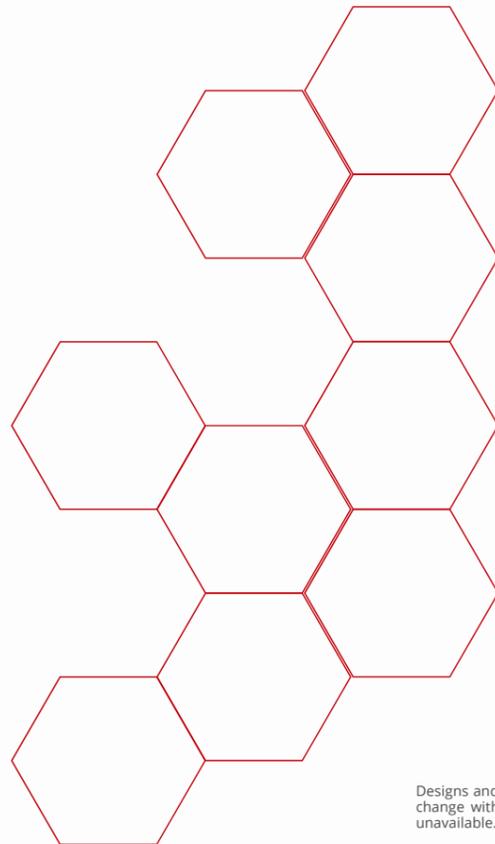


Procare


Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062
Mob no: +91 8377832832
Web Site : www.procaremedfurn.com
GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

CE

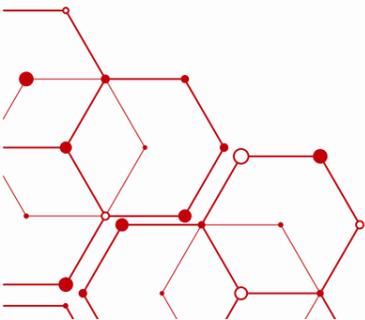

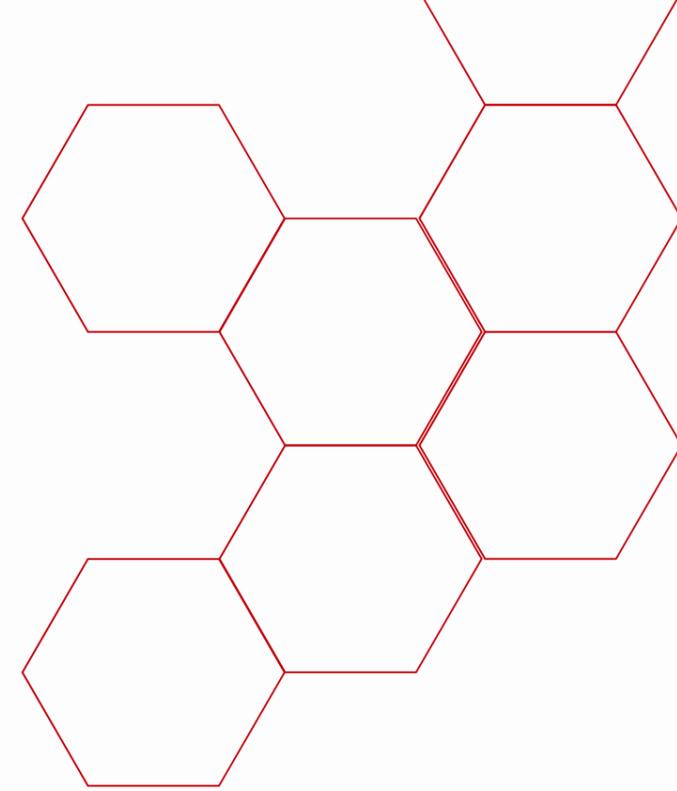


PRO-OS-5

www.procaremedfurn.com

Accompanying the Recovery Journey

Create a Safer Environment

- Intensity: 1,55,000 Lux
- No. of LED's: 55
- Intensity Control: 10~100 Digital
- Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 44 watt
- Dal memory function

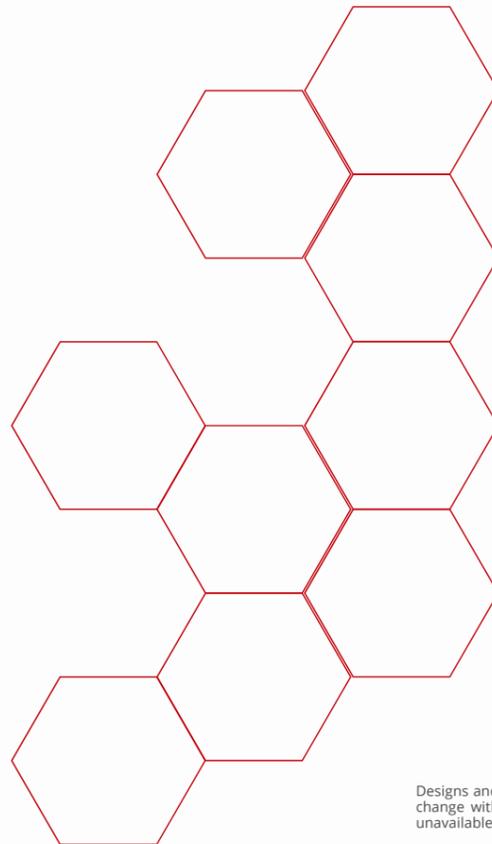

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062
Mob no: +91 8377832832


Web Site : www.procaremedfurn.com

GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

CE

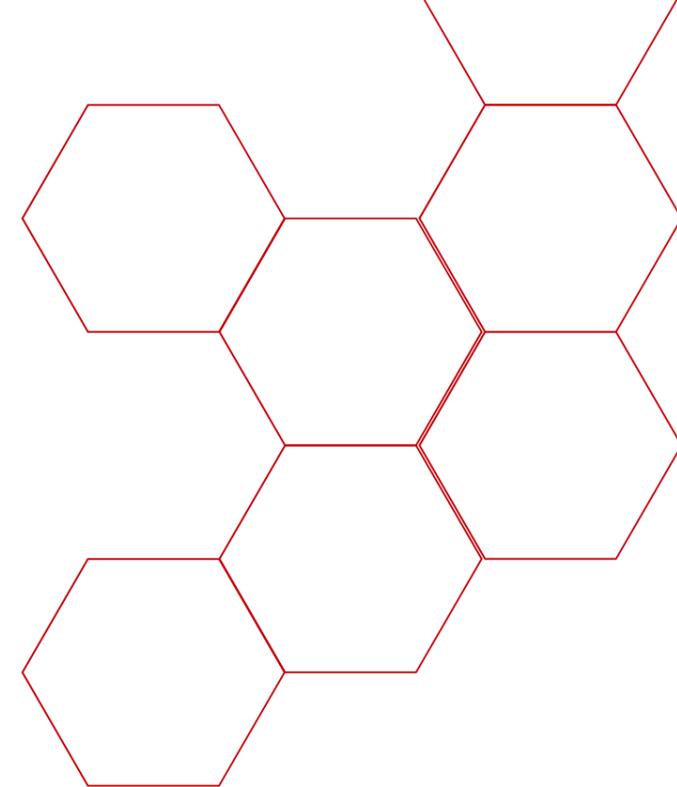


PRO-OS-4

www.procaremedfurn.com

- Intensity: 1,35,000 Lux
- No. of LED's: 44
- Intensity Control: 10~100 Digital
- Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 635 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 35.2 watt
- Dual memory function

Accompanying the Recovery Journey

Create a Safer Environment

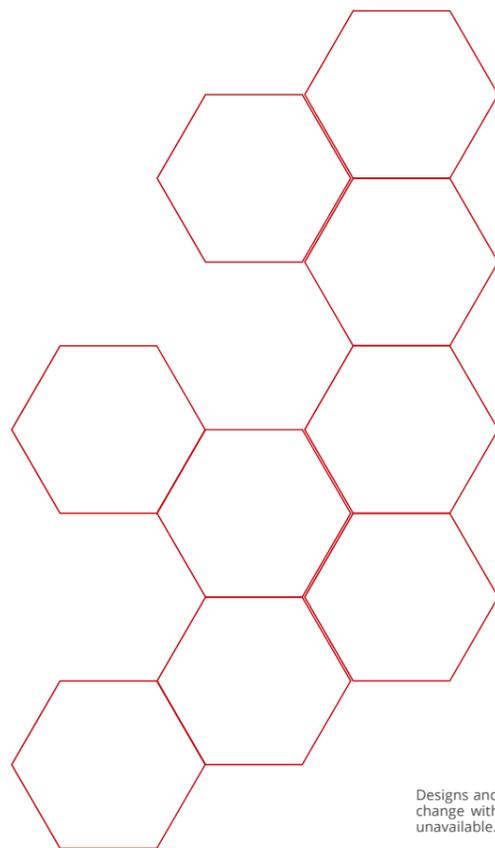

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062

Mob no: +91 8377832832


Web Site : www.procaremedfurn.com

GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

CE

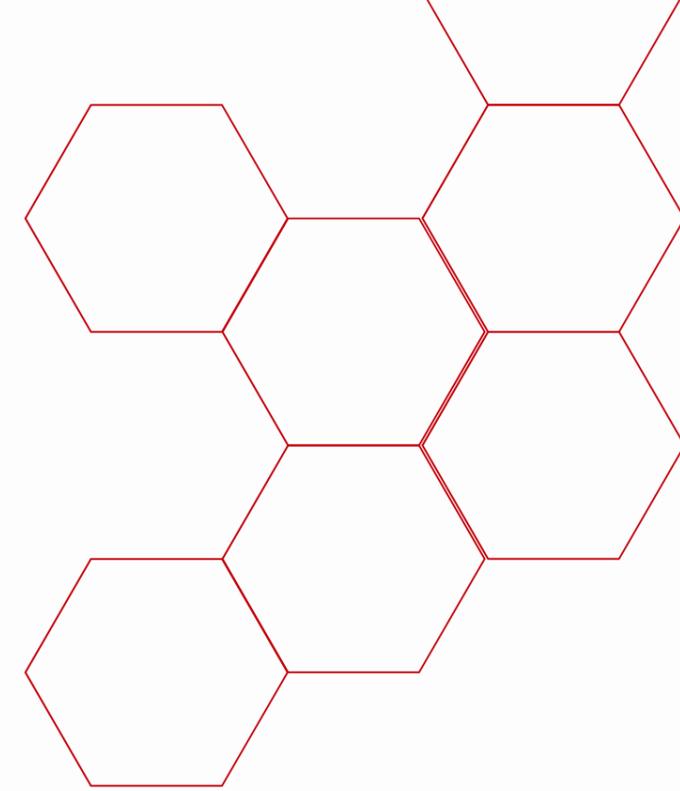


PRO-OS-303

www.procaremedfurn.com

Accompanying the Recovery Journey

Create a Safer Environment

- Intensity: 1,00,000 +1,00,000 Lux
- No. of LED's: 33 + 33
- Intensity Control: 10~100 Digital
- Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 585 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 26.4 + 26.4 watt
- Special Function: Dual memory function

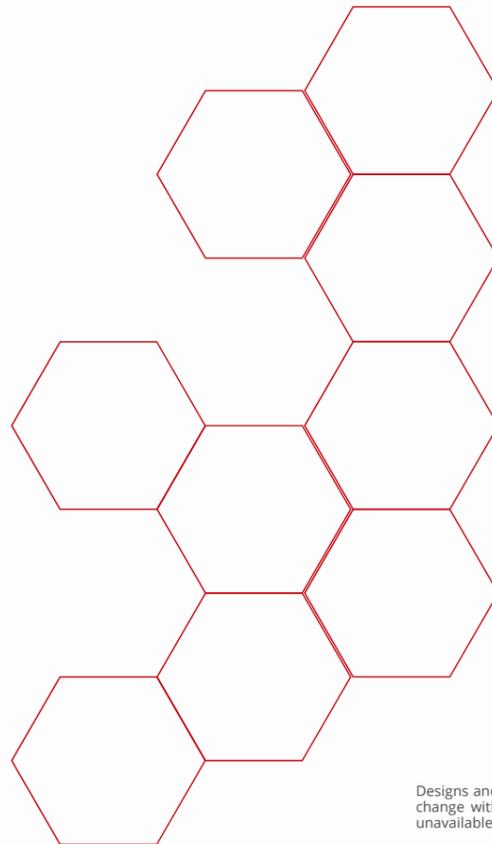


CE

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062
Mob no: +91 8377832832
Web Site : www.procaremedfurn.com
GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

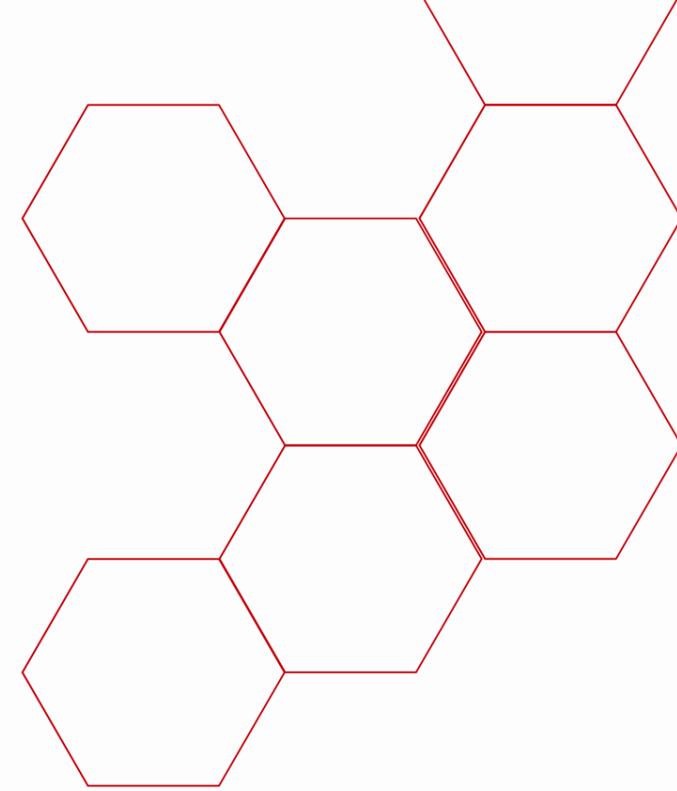


PRO-OS-3

www.procaremedfurn.com

- Intensity: 1,00,000 Lux
- No. of LED's: 33
- Intensity Control: 10~100 Digital
- Touch Depth Diameter: 10-25 cm
- Spot Diameter: 100-150 mm
- Power Supply: 220V/50Hz AC
- Diameter of Light: 585 mm
- Colour Temp.: 3800 - 4800k
- LED Average life: >50000 Hrs.
- Focusing: Manual
- Colour Rendering Index: 93 Ra
- Power Consumption: 26.4 watt
- Dual memory function

Accompanying the Recovery Journey

Create a Safer Environment

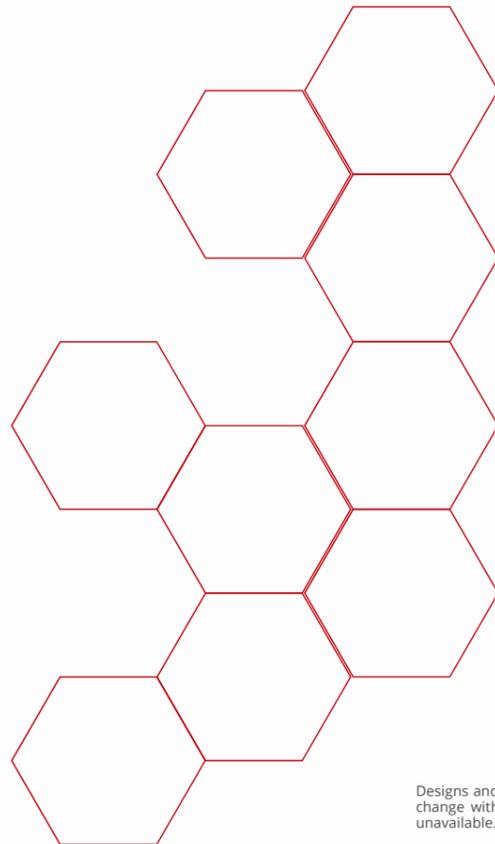

Procare

Address: Gate no 197, Dehu Alandi road,
Jadhavwadi, Chikali Pune,
Maharashtra-411062
Mob no: +91 8377832832

Web Site : www.procaremedfurn.com
GST NO: 27ABCFP8176F1ZY

Designs and specifications are subject to change without notice. All images of the product, its components and accessories may not reflect the final product. The images may reflect optional equipment and are subject to change without notice. All information presented herein is based on current data or design goals available at the time of posting and is subject to change without notice. Some equipment and/or features may be unavailable. Actual results of performance and other specifications may differ or vary with production models and may depend on selected models and/or accessories.

Procare

CE